



**OSAWA  
NORM**

**8XD**



4 guide chamfers  
4 fasi  
4 Führungsfasen  
4 listels


**NEW**

**3584HTA**



3584HTA (m7)

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~20
tol. D µ	+12 / +2	+16 / +4	+21 / +6	+25 / +7	+29 / +8



D(m7)	d(h6)	l1	l2	L	Stock
mm 3.00	6	32	40	85	●
3.10	6	32	40	85	○
3.20	6	32	40	85	●
3.30	6	32	40	85	●
3.40	6	32	40	85	○
3.50	6	32	40	85	●
3.60	6	36	40	85	○
3.70	6	36	40	85	○
3.80	6	36	40	85	●
3.90	6	36	40	85	○
4.00	6	38	46	85	●
4.10	6	38	46	85	●
4.20	6	38	46	85	●
4.30	6	40	46	97	●
4.40	6	40	46	97	○
4.50	6	44	46	97	●
4.60	6	44	46	97	○
4.70	6	44	46	97	○
4.80	6	44	46	97	●
4.90	6	44	46	97	○
5.00	6	48	57	97	●
5.10	6	48	57	97	●
5.20	6	48	57	97	●
5.30	6	48	57	97	○
5.40	6	48	57	97	○
5.50	6	48	57	97	●
5.60	6	48	57	97	●
5.70	6	48	57	97	○
5.80	6	48	57	97	●
5.90	6	48	57	97	○
6.00	6	48	57	97	●
6.10	8	64	76	116	●
6.20	8	64	76	116	●
6.30	8	64	76	116	●
6.40	8	64	76	116	○
6.50	8	64	76	116	●

● stock standard ○ non-standard stock EX stock exhaustion



4 guide chamfers  
4 fasi  
4 Führungsfasen  
4 listels


**NEW**

**3584HTA**



**3584HTA (m7)**

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~20
tol. D µ	+12 / +2	+16 / +4	+21 / +6	+25 / +7	+29 / +8

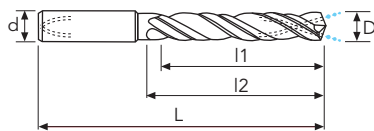

D(m7)	d(h6)	l1	l2	L	Stock
mm 6.60	8	64	76	116	○
6.70	8	64	76	116	○
6.80	8	64	76	116	●
6.90	8	64	76	116	○
7.00	8	64	76	116	●
7.10	8	64	76	116	●
7.20	8	64	76	116	●
7.30	8	64	76	116	○
7.40	8	64	76	116	○
7.50	8	64	76	116	●
7.60	8	64	76	116	○
7.70	8	64	76	116	○
7.80	8	64	76	116	●
7.90	8	64	76	116	○
8.00	8	64	76	116	●
8.10	10	80	95	142	●
8.20	10	80	95	142	●
8.30	10	80	95	142	●
8.40	10	80	95	142	○
8.50	10	80	95	142	●
8.60	10	80	95	142	●
8.70	10	80	95	142	○
8.80	10	80	95	142	●
8.90	10	80	95	142	○
9.00	10	80	95	142	●
9.10	10	80	95	142	●
9.20	10	80	95	142	●
9.30	10	80	95	142	○
9.40	10	80	95	142	○
9.50	10	80	95	142	●
9.60	10	80	95	142	○
9.70	10	80	95	142	○
9.80	10	80	95	142	●
9.90	10	80	95	142	○
10.00	10	80	95	142	●
10.20	12	96	114	163	●

● stock standard ○ non-standard stock EX stock exhaustion



**OSAWA  
NORM**

**8XD**



4 guide chamfers  
4 fasi  
4 Führungsfasen  
4 listels


**NEW**

**3584HTA**



**3584HTA (m7)**

Ø mm	1~3	3.1~6	6.1~10	10.1~18	18.1~20
tol. D µ	+12 / +2	+16 / +4	+21 / +6	+25 / +7	+29 / +8

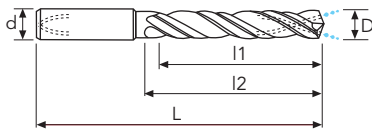

D(m7)	d(h6)	l1	l2	L	Stock
mm 10.50	12	96	114	163	●
10.80	12	96	114	163	●
11.00	12	96	114	163	●
11.20	12	96	114	163	●
11.30	12	96	114	163	○
11.50	12	96	114	163	●
11.80	12	96	114	163	●
12.00	12	96	114	163	●
12.20	14	112	133	182	●
12.50	14	112	133	182	●
12.80	14	112	133	182	●
13.00	14	112	133	182	●
13.50	14	112	133	182	●
14.00	14	112	133	182	●
14.50	16	128	152	204	●
15.00	16	128	152	204	●
15.50	16	128	152	204	●
16.00	16	128	152	204	●

● stock standard   ○ non-standard stock   EX stock exhaustion